




WITHOUT NOSE BAR
Compatible with medical imaging

Perfectly suited to all types of medical imaging

Bacterial Filtration

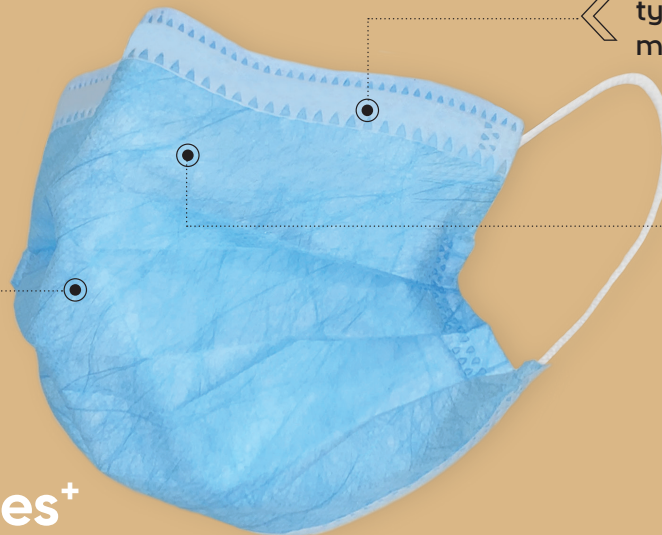

Comfortable and breathable

The Advantages⁺

- 100% French manufacturing
- **WITHOUT NOSE BAR: compatible with medical imaging**
- Electrostatic filter fleece
- Very comfortable – Excellent respiratory comfort
- Without latex, silicone, PVC
- Without Graphene
- Manufacturing process guaranteeing the cleanliness of our products from the production line up to the packaging process



Made in France

Category	Non-sterile Class I Medical device Single-use surgical mask (type IIR)
Standard and legislation	<ul style="list-style-type: none"> · EU Medical Devices Directive 93/42/EEC · Complies with standard EN 14683:2019+AC:2019
Description	<ul style="list-style-type: none"> · Mask for medical use, non-sterile, for single use. · Model : 1000 series <p>Specifications :</p> <ul style="list-style-type: none"> · WITHOUT NOSE BAR: compatible with medical imaging · Size M · Dimensions: M. 170 x 95 mm · Bacterial filtration efficiency: see performance table · Mask weight (+/- 5%): · Type IIR : M 2.90 gr
Composition	<ul style="list-style-type: none"> · Inner and outer layers: polypropylene nonwovens spunbond . · Intermediate layer: nonwovens meltblown in polypropylene. · Elastic: Polyamide / spandex mesh ou polypropylene / spandex mesh · French manufacturing lines – Controlled raw materials and products
Materiovigilance	The materials likely to come into contact with the wearer's skin do not present a risk of irritation or harmful effects to health.
Storage and preservation	Mask should be stored in a clean, dry, cool and well-ventilated place. Humidity less than 80%, temperatures between +5°C and +40°C. Maximum storage period: 5 years in their original packaging.



3-ply Mask for medical use, BLUE
Medical imaging compatible
CE-Marking (Type IIR) - EN14683
Made in France

V 11.04.2022

Performances	EN 14683:2019	Bacterial filtration effectiveness (BFE)	Differential Pressure (Pa/cm ²)	Resistance to projections (kPa)	Cleanliness microbial (cfu/g)
	Type				
	Type II-R	≥ 98 %	< 60	≥ 16	≤ 30
Duration of use	4 hours maximum (in one shift – continuous)				
Sector of use	<ul style="list-style-type: none"> · General public · Professional, sectors for example : <ul style="list-style-type: none"> · Medical sector not exposed to projections and splashes · Medical sector exposed to projections and splashes · Service, community, visitors · Infrastructure, construction · Light industry · Logistics transport · Medico-Social · Retirement home · Schools · Various exposed areas protecting the wearer against the health risk 				
Packaging	Box of 50 units 30 boxes in one cardboard Packaged without bags Or 5 bags of 10 masks				

